Tremulus PCB 2.4.1

Wiring guide

2009-01-22
commonsound.com
design by 4ms Pedals

Bypass stomp
(3PDT switch)

FINE 10k or SYM 500k

SPEED 100k

DEPTH 1k

SMOOTH 500k

GAIN 10k

SPACING 500k

Output Jack

Input Jack

NOTE: The PCB can be wired for Symmetry or for Fine Tuning, fill the jumper SYM or FINE, respectively. For FINE, also omit the 2 x Si Diodes above the jumpers. Note that the Fine Tuning pot is 10k, and the Symmetry pot is 500k.
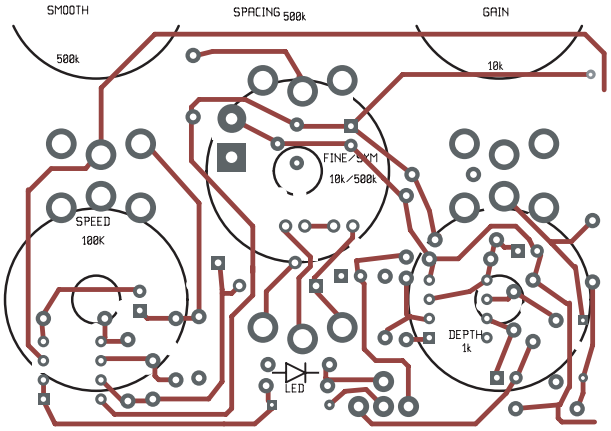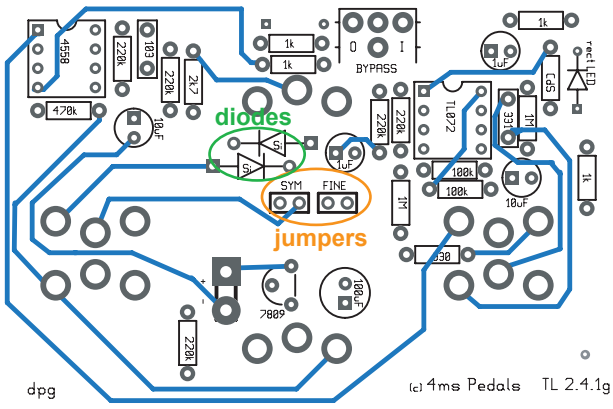
Normally 4ms Pedals' kit is supplied with parts for Symmetry.